




U S 11



INVESTOR IN PEOPLE

CERTIFIED COPY OF PRIORITY DOCUMENT

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 22 NOV 2000

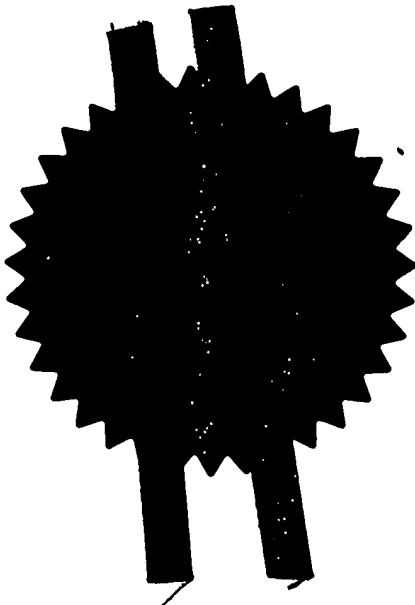

This Page Blank (uspto,

The
Patent
Office

1/77

07APR00 E527721-2 D02879

P01/7700 0.00 0008488.9

Request for grant of a patent

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

07 APR 2000

Cardiff Road
Newport
Gwent NP9 1RH.

1.	Your reference	PHGB 000044		
2.	Patent application number (The Patent Office will fill in this part)	0008488.9		
3.	Full name, address and postcode of the or of each applicant (<u>underline all surnames</u>)	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS		
	Patents ADP Number (if you know it)	7419294001		
	If the applicant is a corporate body, give the country/state of its incorporation	THE NETHERLANDS		
4.	Title of the invention	RADIO COMMUNICATION SYSTEM AND METHOD OF OPERATING THE SYSTEM		
5.	Name of your agent (if you have one)	COLIN JAMES MOODY		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Philips Corporate Intellectual Property Cross Oak Lane Redhill Surrey RH1 5HA		
	Patents ADP number (if you know it)	7658883001		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority Application number	Date of filing
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:	YES		
	a) any applicant named in part 3 is not an inventor, or			
	b) there is an inventor who is not named as an applicant, or			
	c) any named applicant is a corporate body.			
	See note (d))			

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description

10x2

Claims(s)

5x2

Abstract

1x2

Drawings

3x2

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and

search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)

Any other documents

(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 06 April 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5278

C J MOODY

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" *Patents Form 7/77* will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION

**RADIO COMMUNICATION SYSTEM AND METHOD
OF OPERATING THE SYSTEM**

5

The present invention relates to a radio communication system having a downlink forward access control channel (FACH) for transmissions by a primary station to one or more secondary stations and an uplink random access channel for transmissions from at least one of the secondary stations to the primary station, and further relates to primary and secondary stations for use in such a system and to a method of operating such a system. While the present specification describes a system with particular reference to the emerging Universal Mobile Telecommunication System (UMTS), it is to be understood that the techniques described are equally applicable to use in other mobile radio systems. In this specification the term random access packet channel refers to the logical channel on which random access packet transmissions take place, which would typically consist of a number of distinct physical channels.

20 In CDMA systems such as UMTS, power control is important in order to minimise the interference caused to other transmissions while maintaining an acceptable error rate on the transmission in question.

The initial transmit power of a new transmission can be set to give approximately the desired signal to interference ratio (SIR) at the receiver if the approximate path loss of the radio channel (and preferably interference levels at the receiver) are known. The path loss and interference can be considered characteristics of the radio channel.

This is used for example in setting the initial transmit power of uplink dedicated channels (DCHs) in UMTS frequency division duplex (FDD) mode. In this case, the transmit power of the downlink Common Pilot Channel (CPICH) is notified to the secondary stations (referred in UMTS as user equipments UEs), which then measure the received power and use these two

30

This Page Blank (uspto;

values to calculate the approximate downlink path loss. This is assumed to give an approximate estimate of the uplink path loss, which enables a new uplink transmission to be commenced at a power which is a suitable function of the estimated uplink path loss.

5 In the UMTS specifications, the Forward Access Channel (FACH) is an example of a common downlink channel which is used for conveying information including signalling information to UEs. However, it is not currently possible for the initial transmit power of the FACH to be set appropriately for the path loss as there is no continuous uplink channel for the primary station to
10 measure, nor is there a suitable uplink channel defined for notifying the downlink path loss or UE's transmit power to the primary station.

An object of the present invention is to control the initial transmit power and/or bit rate of a primary station on a downlink channel which has no
15 complementary uplink channel.

According to a first aspect of the present invention there is provided a method of operating a radio communication system having a downlink channel for transmissions by a primary station to one or more secondary stations and an uplink random access channel for transmissions from the or each
20 secondary station to the primary station, the method comprising the secondary station transmitting an uplink signal on the random access channel giving an indication of the radio channel characteristics, and the primary station transmitting a signal on the downlink channel at a power level and/or bit rate which takes into account the indicated radio channel characteristics.

25 According to a second aspect of the present invention there is provided a method of operating a radio communication system having a downlink channel for transmissions by a primary station to one or more secondary stations and an uplink random access channel for transmissions from the or each secondary station to the primary station, the method comprising the
30 secondary station transmitting an uplink signal on the random access channel, which uplink signal can be used by the primary station to determine the prevailing radio channel characteristics of the random access channel, the

This Page Blank (uspto)

primary station in response to determining the radio channel characteristics transmitting a signal on the downlink channel at a power level and/or bit rate which takes into account the determined radio channel characteristics.

According to a third aspect of the present invention there is provided a
5 radio communication system comprising a primary station having transceiving means for transmitting signals on a downlink channel and at least one secondary station having transceiving means for transmitting uplink signals to the primary station on a random access channel, the secondary station having means for determining the prevailing radio channel characteristics of the
10 random access channel and for transmitting these characteristics to the primary station, the primary station having means responsive to the receipt of the radio channel characteristics for determining the power level and/or bit rate of a downlink signal in dependence on the radio channel characteristics.

According to a fourth aspect of the present invention there is provided a
15 secondary station comprising transceiving means for receiving downlink signals from a primary station and for transmitting uplink signals on a random access channel and means for determining the prevailing radio channel characteristics of the random access channel and for transmitting these characteristics to the primary station.

20 According to a fifth aspect of the present invention there is provided a primary station comprising transceiving means for transmitting signals on a downlink channel to at least one secondary station and for receiving uplink random access channel signals including indicia useable for determining the prevailing radio channel characteristics of the random access channel, and
25 means responsive to the indicia for determining the power level and/or bit rate to transmit downlink signals to the at least one secondary station.

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

30 Figure 1 is a block schematic diagram of a radio communication system;

Figure 2 illustrates signalling on the uplink and downlink channels;

This Page Blank (uspto,

Figure 3 is flow chart showing the process by which a primary station sets the transmit power on the FACH channel, and

Figure 4 illustrates an example of using timing offsets for sending power levels/channel attenuation characteristics.

5 In the drawings the same reference numerals have been used to indicate corresponding features.

Referring to Figure 1, a radio communication system comprises a primary station (BS) 100 and a plurality of secondary stations (MS) 110 which
10 are capable of roaming within the coverage area of the primary station. The BS 100 comprises a microcontroller (μ C) 102, transceiver means (Tx/Rx) 104 connected to signal propagating/receiving means, for example an antenna 106, power control means (PC) 107 for altering the transmitted power level, and connection means 108 for connection to the PSTN or other suitable
15 network. Each MS 110 comprises a microcontroller (μ C) 112, transceiver means (Tx/Rx) 114 connected to signal propagating/receiving means, for example an antenna 116, and power control means (PC) 118 for altering the transmitted power level. Communication from BS 100 to MS 110 takes place on a downlink channel 122, while communication from MS 110 to BS 100
20 takes place on an uplink channel 124.

In UMTS there are several channels of communication between the primary station 100 and the secondary stations 110. Amongst the non-dedicated channels is the FACH which is a downlink channel from the primary station and which is used for conveying information, including signalling
25 information to individual secondary stations 110, groups of secondary stations or the entire population of secondary stations.

Another non-dedicated channel is a random access channel (RACH) which enables a secondary station to send short messages on the uplink to the primary station. Such short messages may include signalling to the
30 primary station when the secondary station is turned on, sending a packet of data to the primary station when the secondary station may or may not be

This Page Blank (uspto)

engaged in a call, and requesting the primary station to allocate a resource, for example a dedicated voice channel, for the secondary station to use.

The FACH downlink channel is often used in conjunction with the RACH uplink channel, whereby a short RACH message is transmitted on the uplink prior to a FACH message on the downlink.

Figure 2 illustrates a basic scheme of the RACH operating in a CDMA FDD system comprising for convenience of illustration a downlink channel 122 and an uplink RACH 124. The RACH transmission commences with a 1.067ms Access Preamble (AP) 202A at a power calculated as a function of the estimated downlink path loss and an offset given by the network. If the secondary station does not receive an acknowledgement ACK of the AP 202A, it repeats the AP 202B at a transmit power which is higher than the first power by a predetermined amount set by the network. The secondary station continues to repeat the AP with increasing power until either it is acknowledged or the process is aborted. If the AP 202B is acknowledged 206, the secondary station then transmits a short (10ms or 20ms) message PKT at a power higher than that of the last AP 202B by an amount which is predetermined by the network.

The primary station cannot estimate the uplink path loss from the received RACH transmissions because it does not know the value of the downlink path loss which was estimated by the secondary station, nor does it know how many Access Preambles were transmitted.

The primary station is therefore not able to set the initial transmit power of the ensuing FACH message 220 to an appropriate value to compensate for the prevailing path loss.

The method in accordance with the present invention provides a means for the secondary stations 110 to notify the primary station 100 of the downlink path loss or of the transmit power of the RACH transmissions so that the primary station can estimate the downlink path loss and set the initial power of the FACH appropriately. Optionally the primary station 100 may independently control the power of transmitted bits destined for different secondary stations to take into account their respective ranges and path loss.

This Page Blank (uspto)

For RACH, in the case where the transmit power is signalled, in the Access Preamble the downlink path loss could be derived by knowing in addition the number of re-transmissions of the Access Preamble. Here, the power of the first preamble transmission is derived by a pre-determined power offset from the measured downlink path loss and the primary station transmit power, so knowing the power of the first access preamble transmission gives the power loss. This can therefore be derived from the power of the final Access Preamble transmission, knowing the number of re-transmissions and the power step for each one.

10 In some cases errors may be introduced by fast fading on uplink and downlink, and by measurement or other implementation errors.

Other methods which can be used for determining the radio channel characteristics of the signal path between the primary station 100 and a selected secondary station 110 include (a) the primary station including its transmitted power level in a transmitted downlink message and a secondary station measuring the received signal strength and determining the channel characteristic which can be included in an uplink signal, such as the Access Preamble; (b) as a variant of (a), the secondary station simply includes an indication of the received signal strength in the uplink signal and the attenuation characteristic is determined by the primary station; and (c) the secondary station determines the SIR of a downlink message and relays the determined SIR in a signal such as the Access Preamble or the RACH message part (PKT).

Figure 3 shows a flow chart of the sequence of operations involved in sending and processing the signals shown in Figure 2. The flow chart begins at block 300 which represents a secondary station 110 transmitting an Access Preamble (AP) at a low power on the RACH. The secondary station then listens on the downlink for an acknowledgement ACK, block 302. Block 304 relates to the secondary station determining if it has received an ACK. If the answer is No (N) then in block 306 the secondary station increases its transmitter power so that in the block 300, the AP is transmitted at a higher power. If the answer is Yes (Y), then in block 308 the secondary station

This Page Blank (uspto,

transmits a data packet at a higher power than the successfully received AP. Block 310 denotes the primary station estimating the channel attenuation characteristic which is used in block 312 to adjust its transmitter power. Finally in block 314, the primary station transmits a data packet on the FACH.

5 Ideally the transmission of one or more of the downlink path loss, initial transmit power, current transmit power or the number of re-transmissions of the AP is carried out in a way which does not add significantly to the signalling overhead of the system.

10 In the case of UMTS, one or more of the following methods can be used. Firstly signalling in the message part of the RACH, for example in PKT. Secondly offsetting in time each AP by a number of chip periods corresponding to the signalled quantity. Thirdly creating a plurality of access sub-channels, for example 12 random access sub-channels, and selecting one of the access sub-channels according to the signalled quantity. Fourthly
15 assigning a plurality of encoding signatures, for example 16 signatures, to requests on RACH and selecting a particular one of the signatures for the AP according to the signalled quantity.

20 The choice of sub-channel and/or signature gives up to 196 combinations using the figures given in the previous paragraph. Using time offsets can significantly increase the number of combinations to not only send power/channel information but also other information without adding significantly to the signalling overhead of the system.

25 Figure 4 illustrates one example of how a time offset can be implemented. The time of transmission of the access preamble 202A may be offset by T_{off} with respect to the boundary 302 of the access slot (which is itself defined relative to timing signals transmitted by the BS 100). The access preamble 202A, 202B comprises 4096 chips, while the length of the access slot is 5120 chips. By allowing timing offsets T_{off} of multiples of 256 chips, up to 19 different non-zero values of T_{off} are possible without introducing
30 ambiguity about which slot contained the access preamble 202A, 202B. When $T_{\text{off}} = 0$ the behaviour of the system is identical to that of a system without the

This Page Blank (uspic,

possibility of timing offsets, thereby enabling backwards compatibility with a MS 110 not having the capability to process timing offsets.

The timing offset T_{off} preferably advances the transmission time of the access preambles 202A, 202B since any delay in its transmission might mean
 5 that the BS 100 is unable to detect the preamble in time to transmit an access acknowledgement ACK 206 in an appropriate time slot.

It is preferable for there to be no timing offsets in the downlink channels 122, so that the acknowledgement 206 of an access preamble 202A, 202B is the same irrespective of the timing offset used.

10 The availability of many more signalling combinations (19 times more in the embodiment described here) enables significantly more efficient resource allocation. For example, in the case of channel assignment it enables there to be more bit rates available than the number of signatures. It also reduces the collision probability, which could otherwise be unacceptable if the same bit rate
 15 was typically requested by many MSs 110.

The range of the signalled quantity can be quantised into a number of predetermined ranges, depending on the number of time offsets, sub-channels and signatures which are assigned to the notification of the signalled quantity.

In the example case of using different time offsets to send the transmit
 20 power (initial or current), two offsets could be used to indicate within which of two ranges the quantity lies, e.g:

Offset (no of chips)	Transmit power of AP
256	<-10dBm
512	≥-10dBm

Alternatively, sets of offsets could be used to indicate the transmit
 25 power level. This method enables the offsets within each set to be used for other signalling:

Offset (no of chips)	Transmit power of AP
256,512,768,1024,1280,1536,1792,2048,2304,2560	<-10dBm
2816,3072,3328,3585,3840,4096,4352,4608,4864	≥-10dBm

This Page Blank (uspto)

Similarly, the transmit power could be notified to the primary station more accurately by quantising the transmit power into smaller ranges such as $\text{TxPwr} < -20\text{dBm}$, $-20\text{dBm} \leq \text{TxPwr} < 0\text{dBm}$, $0\text{dBm} \leq \text{TxPwr}$ etc.

5 In another implementation the notification to the primary station of a quantity such as number of re-transmissions or current power of the AP can be performed by increasing, or otherwise adjusting, the time offset of the AP with each subsequent re-transmission.

10 In a further implementation, the notification to the BS of the measured quantity such as AP transmit power can be performed by means of a small number of signalling bits within the RACH message packet PKT.

A similar procedure could be applied to channels other than the FACH. It could also be applied to the initial power of downlink channels e.g. DPCH or CPCH message part, which are preceded by RACH (or RACH like) access
15 preamble transmissions.

The method in accordance with the present invention may be applied to FDD (frequency division duplex), TDD (time division duplex), CDMA, TDMA and/or CDMA/TDMA/FDMA systems.

20 Although the specific description refers to adjusting the transmit power of the FACH, the initial bit rate will also be selected together with the transmit power.

In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other elements or steps
25 than those listed.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of radio communication systems and component parts therefor and which may be used
30 instead of or in addition to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present

This Page Blank (uspto)

application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical
5 problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of such features during the prosecution of the present application or of any further application derived therefrom.

This Page Blank (uspto)

CLAIMS

1. A method of operating a radio communication system having a downlink channel for transmissions by a primary station to one or more secondary stations and an uplink random access channel for transmissions from the or each secondary station to the primary station, the method comprising the secondary station transmitting an uplink signal on the random access channel giving an indication of the radio channel characteristics, and the primary station transmitting a signal on the downlink channel at a power level and/or bit rate which takes into account the indicated radio channel characteristics.

2. A method of operating a radio communication system having a downlink channel for transmissions by a primary station to one or more secondary stations and an uplink random access channel for transmissions from the or each secondary station to the primary station, the method comprising the secondary station transmitting an uplink signal on the random access channel, which uplink signal can be used by the primary station to determine the prevailing radio channel characteristics of the random access channel, the primary station in response to determining the radio channel characteristics transmitting a signal on the downlink channel at a power level and/or bit rate which takes into account the determined radio channel characteristics.

3. A method as claimed in claim 1 or 2, characterised in that the primary station transmits a signal including an indication of the transmitted power level, and in that a secondary station receiving said signal measures the received signal strength and determines the channel characteristic of the downlink and transmits a signal including an indication of the channel characteristic on the random access channel.

This Page Blank (uspto)

4. A method as claimed in claim 1 or 2, characterised in that the primary station transmits a signal including an indication of the transmitted power level, and in that a secondary station receiving said signal measures the received signal strength and transmits a signal including an indication of the received signal strength on the random access channel.

5. A method as claimed in claim 1 or 2, characterised in that a secondary station retransmits an access preamble signal at successively increasing power levels until an acknowledgement signal is received from the primary station, the secondary station in response to the receipt of the acknowledgement signal transmitting a message containing an indication which can be used by the primary station to determine the prevailing radio channel characteristic from the particular retransmission of the access protocol signal acknowledged.

6. A method as claimed in claim 1 or 2, characterised in that a secondary station retransmits an access preamble signal at successively increasing power levels until an acknowledgement signal is received from the primary station, each transmission of the access protocol signal including an indication of its power, and in that the primary station stores an indication of the lowest transmission power of the access protocol signal and can determine the channel characteristic by obtaining the difference between the lowest transmission power and the power of the access protocol signal received and acknowledged.

7. A method as claimed in any one of claims 1 to 6, characterised in that the channel characteristic comprises the radio attenuation characteristic.

8. A method as claimed in claim 1 or 2, characterised in that a secondary station determines the signal to interference ratio (SIR) of a signal transmitted by the primary station and includes an indication of the determined SIR in a signal transmitted on the random access channel.

This Page Blank (uspto)

9. A method as claimed in any one of claims 1 to 8, characterised in that the uplink signal comprises a message part of the random access channel
5 signal.

10. A method as claimed in any one of claims 1 to 8, characterised in that the random access channel includes the transmission of access preambles by the secondary station, in that the access preambles are
10 encoded with a selected one of a plurality of signatures, and in that the selected signature is chosen according to a quantity to be signalled.

11. A method as claimed in any one of claims 1 to 8, characterised in that the random access channel comprises a plurality of access sub-channels,
15 and in that an access sub-channel is selected by a secondary station for the transmission of an access preamble in accordance with a quantity to be signalled.

12. A method as claimed in any one of claims 1 to 8, characterised in
20 that the random access channel is a CDMA channel and in that the transmission of an access preamble is offset in time by a number of chip periods corresponding to a quantity to be signalled.

13. A radio communication system comprising a primary station
25 having transceiving means for transmitting signals on a downlink channel and at least one secondary station having transceiving means for transmitting uplink signals to the primary station on a random access channel, the secondary station having means for determining the prevailing radio channel characteristics of the random access channel and for transmitting these
30 characteristics to the primary station, the primary station having means responsive to the receipt of the radio channel characteristics for determining

This Page Blank (uspto)

the power level and/or bit rate of a downlink signal in dependence on the radio channel characteristics.

14. A system as claimed in claim 13, characterised in that the or
5 each secondary station has encoding means for transmitting access preamble signals as CDMA signals and in that said encoding means includes signal offsetting means for offsetting in time an access preamble signal by a number of chip periods corresponding to the radio channel characteristics.

10 15. A secondary station comprising transceiving means for receiving downlink signals from a primary station and for transmitting uplink signals on a random access channel and means for determining the prevailing radio channel characteristics of the random access channel and for transmitting these characteristics to the primary station.

15 16. A secondary station as claimed in claim 15, characterised in that the secondary station further includes encoding means for transmitting access preamble signals as CDMA signals and in that said encoding means includes signal offsetting means for offsetting in time an access preamble signal by a
20 number of chip periods corresponding to the radio channel characteristics.

17. A primary station comprising transceiving means for transmitting signals on a downlink channel to at least one secondary station and for receiving uplink random access channel signals including indicia useable for
25 determining the prevailing radio channel characteristics of the random access channel, and means responsive to the indicia for determining the power level and/or bit rate to transmit downlink signals to the at least one secondary station.

30 18. A primary station as claimed in claim 17, wherein the uplink signals comprise CDMA access preamble signals and the indicia comprises a timing offset of the access preamble signal relative to a reference time,

This Page Blank (uspto)

characterised in that the primary station comprises means for determining the timing offset and for adjusting the transmit power level in accordance with the timing offset.

5 19. A method of operating a radio communication system substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

10 20. A radio communication system constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

15 21. A secondary station constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

 22. A primary station constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

This Page Blank (uspto,

ABSTRACT

**RADIO COMMUNICATION SYSTEM AND METHOD
OF OPERATING THE SYSTEM**

5

A radio communication system comprises a primary station (100) for transmitting information signals on a downlink channel (122) and for receiving signals from one or more secondary stations (110) on an uplink random access packet channel (RACH) (124), the downlink and uplink channels being independent of each other. Power control is applied to the transmitted downlink signals by at least one of the secondary stations transmitting indicia indicating the prevailing radio channel characteristics of the uplink channel, the indicia being used by the primary station to apply power control to the downlink signals.

15 If the uplink signals are CDMA signals the indicia may comprise a timing offset which has a value related to the quantity to be signalled.

(Figure 1)

This Page Blank (uspto,

1/3

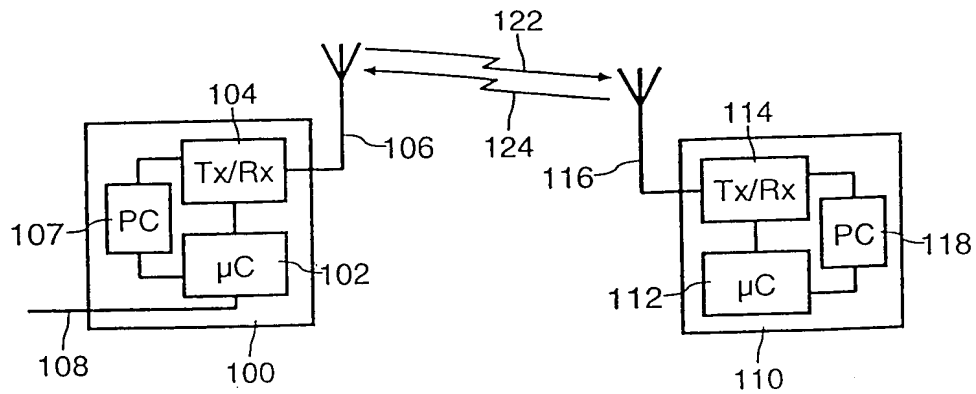


FIG. 1

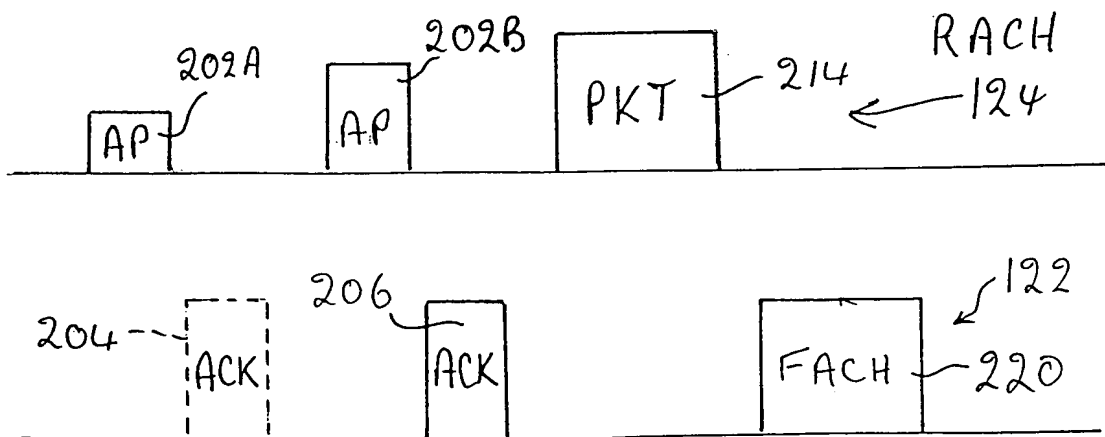


Fig. 2

This Page Blank (uspto)

2/3

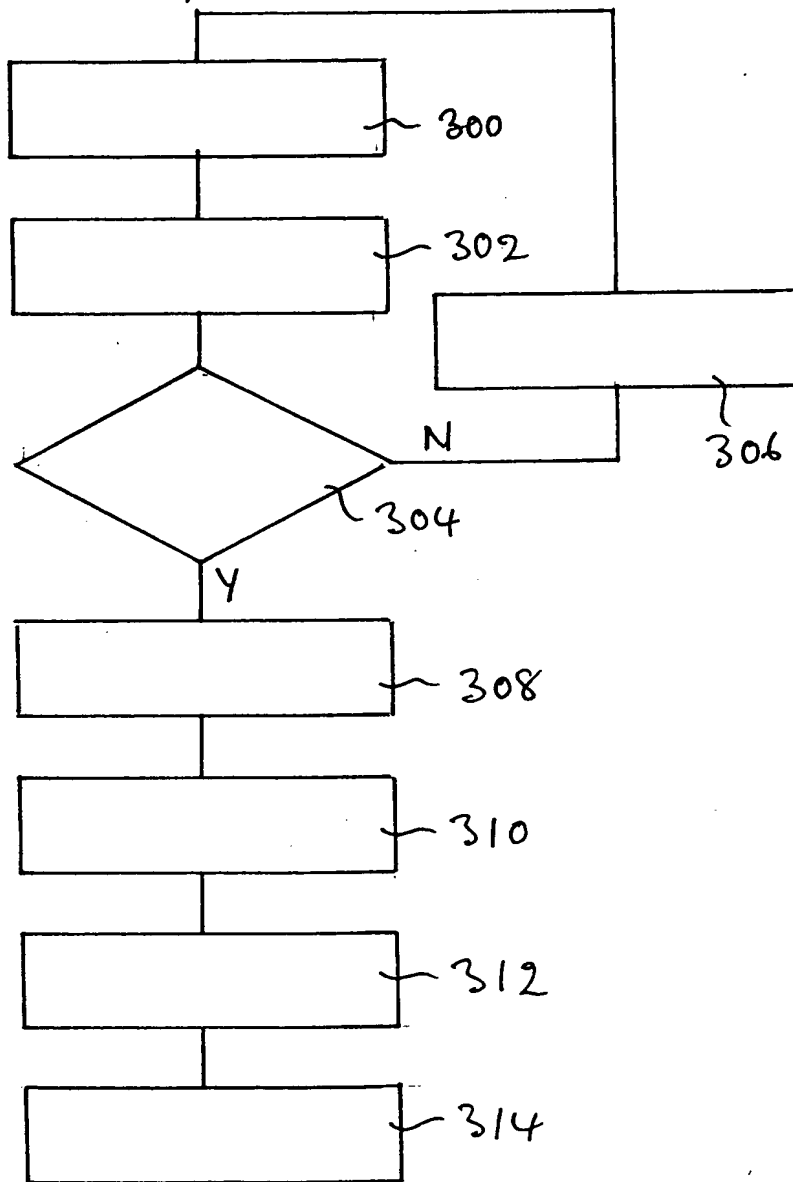


Fig. 3

This Page Blank (uspto)

3/3

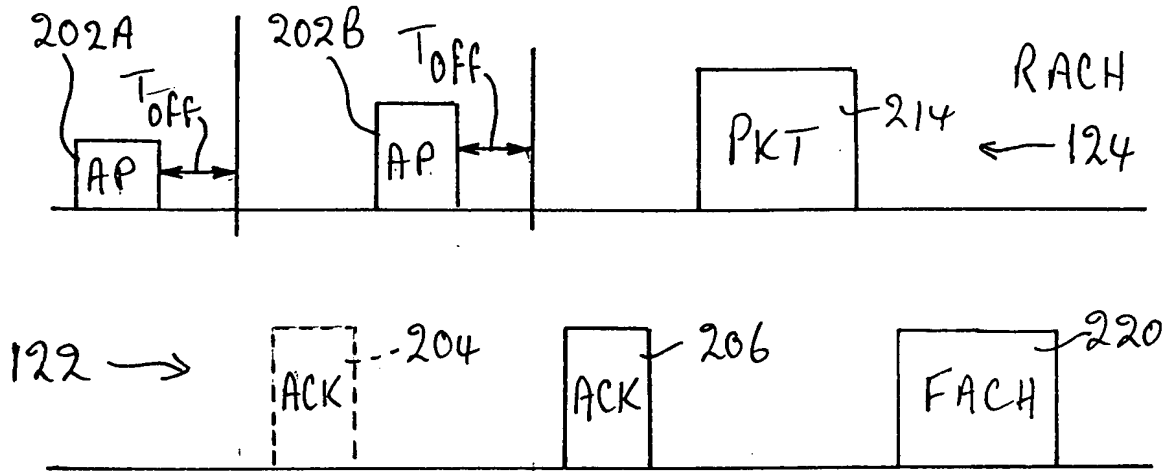


Fig. 4

This Page Blank (uspto)